

Products Information

OF




■ 用途

电脑硬驱、显卡、切换器、网卡等


■ 特征

- 稳定度高。
- TTL/COMS兼容。
- 频率范围广。
- 可先三态控制。


■ DIMENSIONS [mm]

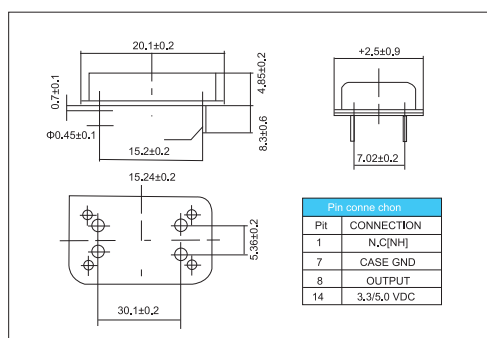

■ TEST CIRCUIT

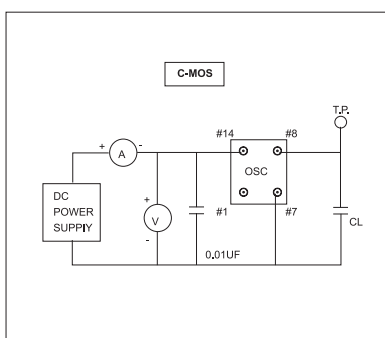

■ WAVEFORM

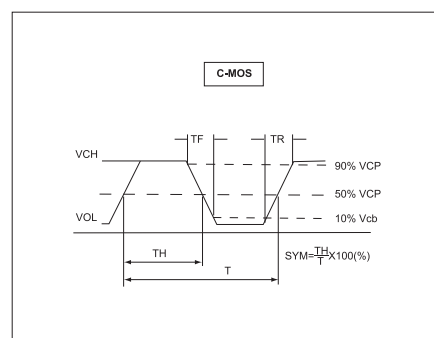

■ STANDARD SPECIFICATION

Item		Type	OF
Frequency Range			1MHz~140MHz
Frequency Stability			±50ppm, ±100ppm
Option on Pin 1			pin 1 No Control/pin 1 Have Control
Power Supply Voltage (VDD)			3.3V±0.3V, 5V±0.5V
Operating Temp			-20~+70 °C
Storage Temp			-55 °C~+125 °C
Out put Character	"O"Level		10%VDD Max.
	"1"Level		90%VDD Min.
	Rise Time(Tr)		10%~90%VDD 10ns Max.
	Fill TimeTr)		90%~10%VDD 10ns Max.
	Symmetry		60/40 to 40/60 at 50%VDD
	Output Load		15pF of 10 LS-TTL STD Gates
Current Consumption			100mA Max.

Please consult for other specifications. (若有其它规格需求请告知)