

Products Information

OH




■ 用途

电脑硬驱、显卡、切换器、网卡等


■ 特征

- 稳定度高。
- TTL/COMS兼容。
- 频率范围广。
- 可先三态控制。


■ DIMENSIONS [mm]

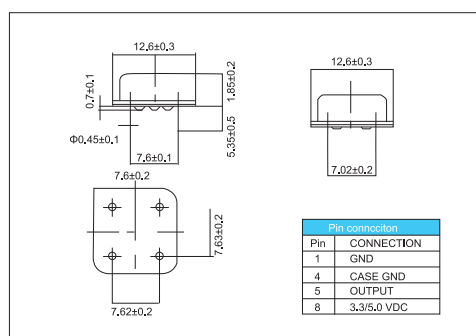

■ TEST CIRCUIT

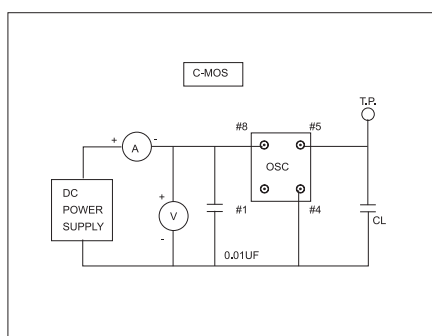

■ WAVEFORM

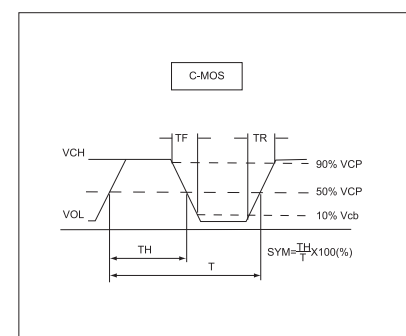

■ STANDARD SPECIFICATION

Item	Type	OH
Frequency Range		1~140MHz
Frequency Stability		±10ppm, ±20ppm, ±30ppm
Option on Pin 1		pin 1 No Control/pin 1 Have Control
Power Supply Voltage (VDD)		3.3V±0.3V, 5V±0.5V
Operating Temp		-20~+70 °C
Storage Temp		-55 °C~+125 °C
Out put Character	"O"Level	10%VDD Max
	"1"Level	90%VDD Min.
	Rise Time(Tr)	10ns Max.
	Rise TimeTr)	10ns Max.
	Symmetry	40/60%
	Output Load	15pF of 10 LS-TTL STD Gates
Current Consumption		100mA Max.

Please consult for other specifications. (若有其它规格需求请告知)